Carton Clamps

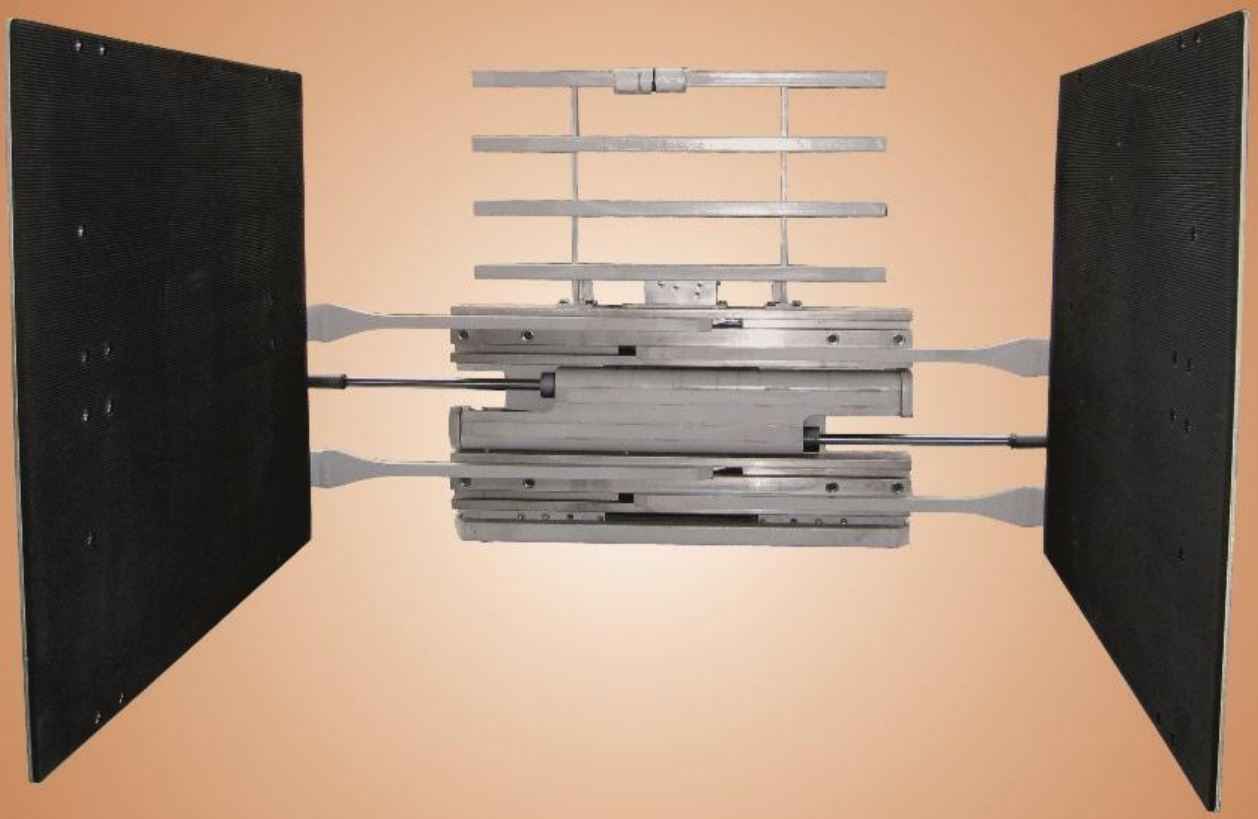

Carton clamp can handle and stack various goods palletless, for those packed in cartons securely and efficently. It is widly used in tobacco industry and household appliances industry, etc.

D-series Carton Clamps

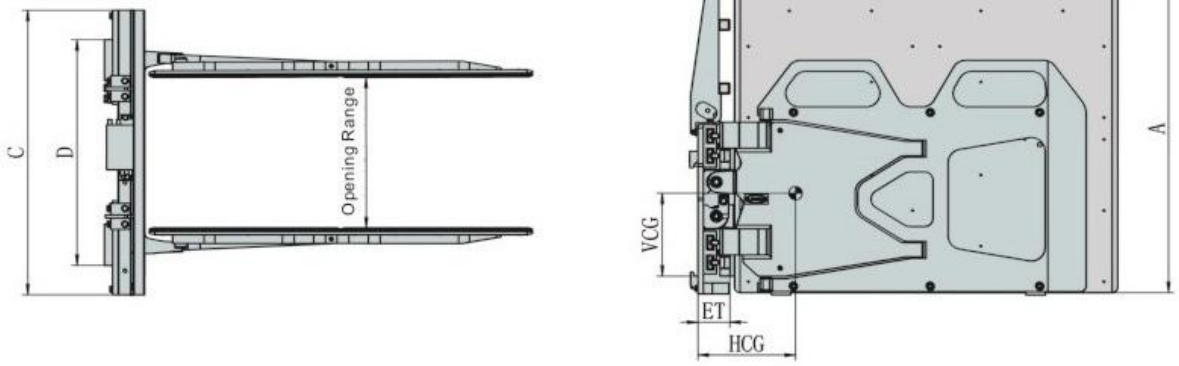

Capacity@ Load Center 承载能力@ 载荷中心 (Kg@mm)	Catalog Order No. 型号	Mounting Class 安装等级	Opening Range 张臂范围 (mm)	Arm Thickness 臂厚 (mm)	Arm Height 臂高 A (mm)	Arm Length 臂长 B (mm)	Frame Width 框架宽度 C (mm)	Hook Spread 挂钩间距 D (mm)	Effective Thickness 失载距 ET (mm)	Vertical Center of Gravity 垂直重心 VCG (mm)	Horizontal Center of Gravity 水平重心 HCG (mm)	Weight 自重 (kg)	Available Forklift 适配叉车 (t)
1200@600	**ZX12D-A1**	II	400-1570	90	1200	1220	1040	825	117	368	429	765	2-2.5t
1360@700	**ZX14D-A1**	II	560-1940	90	1200	1420	1040	825	117	371	504	855	2-2.5t
1360@700	**ZX14D-A2**	II	760-2140	90	1200	1420	1040	825	117	369	497	870	2-2.5t
1360@700	**ZX14D-A3**	II	565-1945	90	1200	1220	1040	825	117	367	424	780	2-2.5t
1360@700	**ZX14D-A4**	II	565-1945	87	1200	1220	1040	825	117	352	396	715	2-2.5t
1360@700	**ZX14D-A4**	II	565-1945	87	1200	1220	1040	825	117	352	396	715	2-2.5t
1360@600	**ZX14D-B1**	III	565-1925	90	1200	1220	1040	825	117	377	424	730	3-4.5t
1360@700	**ZX14D-B3**	III	560-1940	90	1200	1420	1040	825	117	367	506	880	3-4.5t

Capacity@ Load Center (lbs@in)	Catalog Order No.	Mounting Class	Opening Range	Arm Thickness	Arm Height A	Arm Length B	Frame Width C	Hook Spread D	Effective Thickness ET	Vertical Center of Gravity VCG	Horizontal Center of Gravity HCG	Weight (lbs)	Available Forklift (t)
2650@23.5″	**ZX12D-A1**	II	15.7″-61.8″	3.5″	47.2″	48″	40.9″	32.5″	4.6″	14.5″	16.9″	1687	2-2.5t
3000@27.5″	**ZX14D-A1**	II	22.0″-76.4″	3.5″	47.2″	55.9″	40.9″	32.5″	4.6″	14.6″	19.8″	1885	2-2.5t
3000@27.5″	**ZX14D-A2**	II	29.9″-84.3″	3.5″	47.2″	55.9″	40.9″	32.5″	4.6″	14.5″	19.6″	1918	2-2.5t
3000@27.5″	**ZX14D-A3**	II	22.2″-76.6″	3.5″	47.2″	48″	40.9″	32.5″	4.6″	14.4″	16.7″	1720	2-2.5t
3000@27.5″	**ZX14D-A4**	II	22.2″-76.6″	3.5″	47.2″	48″	40.9″	32.5″	4.6″	13.9″	15.6″	1576	2-2.5t
3000@27.5″	**ZX14D-B3**	III	22.0″-76.4″	3.5″	47.2″	55.9″	40.9″	32.5″	4.6″	14.4″	19.9″	1940	3-4.5t

Notes: 1. Please gain the actual overall carrying capacity of forklift trucks/attachments from the forklift truck manufacturers.
2. Forklift truck needs to add two groups of additional oil lines so as to match the attachments.
3. The whole machine is equipped with four-gear pressure regulating valve when delivered from factory.
4. The arm thickness is the needed minimum wedge gap size when clamping, but not the real thickness.