

3 t

ROUGH TERRAIN FORKLIFT



Main features:

- > Widely used in mine fields, orchards, Construction site and other fields.
- > Differential Lock.
- > Higher ground clearance, the angle of the Mast is up to 10° (F)/ 12° (R), Guarantee to pass well.
- > Strong power, large climbing slope, high speed, with domestic and foreign well-known brands of engine
- > Equipped with super wide cross country tires, off-road performance is good.
- > High exhaust is standard configuration, ensure the working environment is good

HELI
LIFTING THE FUTURE





TOP1 FORKLIFT MANUFACTURER AND SELLER
IN CHINA FOR CONSECUTIVE 25 YEARS



ROUGH TERRAIN FORKLIFT 3t

Main performance parameters of 3t ROUGH TERRAIN FORKLIFT

Parameters		Type	CPCD30-W1Y	CPCD30-DC1Y	
Load capacity		kg	3000	3000	
Lift height		mm	3000	3000	
Load centre distance		mm	500	500	
Free lift		mm	150	150	
Wheels, number front/rear (x=driven)			2x/2	2x/2	
speed	Forward	km/h	20	20	
	Backward	km/h	20	20	
Turning radius		mm	3265	3265	
Ground clearance (without load)		mm	270	270	
Total length		mm	4144	4144	
Overall width		mm	1550	1550	
Overall height(mast)		mm	2325	2325	
Wheelbase		mm	1900	1900	
Track width, front		mm	1160	1160	
Track width, rear		mm	1100	1100	
Fork adjustment distance		mm	250 ~ 1435	250 ~ 1435	
Service weight		kg	5050	5050	
Load distance, centre of drive axle to fork		mm	644	644	
Rear overhang		mm	530	530	
Mast Tilt angle F/R		°	10/12	10/12	
Max drawbar pull, laden		N	16500	16500	
Gradient performance with load		%	18%	18%	
braking distance (without load)		m	≤5	≤5	
Engine	Model		ISUZU4GJ2	dachai498	
	Rated Power/Rated Speed		Kw/rpm	46/2450	45/2500
	Max.Torque/Rated Speed		Kw/rpm	186.2/1600	190/1800
Tyre	Tyre size, front	size	15-19.5TL	15-19.5TL	
		pressure	Mpa	0.48	0.48
	Tyre size, rear	size	10-16.5-8PR	10-16.5-8PR	
		pressure	Mpa	0.41	0.41

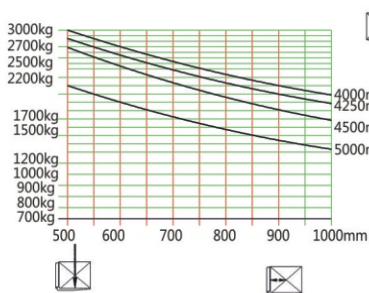

ANHUI HELI CO., LTD.

ADD:NO.668Fangxing Street,Economical Development Zone,Hefei,P.R.China

TEL:(86 551)63639068,63639258,63639358,63662105

FAX:(86 551)63639966

WEBSITE:<http://www.helichina.net>

Email:heli@helichina.net

AUTHORIZED DEALER

*Details of specifications and equipment are based on information available at time of printing and may change without notice.